

V型破碎机

V TYPE GRANULATOR

特点：

- 独特的剪刀型刀架结构，更加有利于提高工作效率；
- 投料斗双层隔音设计，静音效果好；
- 结构合理，操作方便，省电耐用，高效经济；
- 设有安全保护装置，确保操作安全；
- 适用于各种大型中空产品、皮革、PE薄膜、PET矿泉水瓶等破碎回收；
- 选配回收风机效果更佳。


FEATURE:

- Unique scissors type structure, conducive to improve working efficiency.
- The insulation design of hopper can reduce the noise of crushing.
- Scientific structure, convenient for operation, energy saving and durable.
- Equipped with multiple safety protection devices to ensure safe operation.
- Suitable for all kinds of large-scale hollow products, leather, PE film, PET bottles etc.
- Collective device is optional and handy for collecting material after grinding.



V型刀架
V type cutter saddle

结构简图 STRUCTURE DIAGRAM

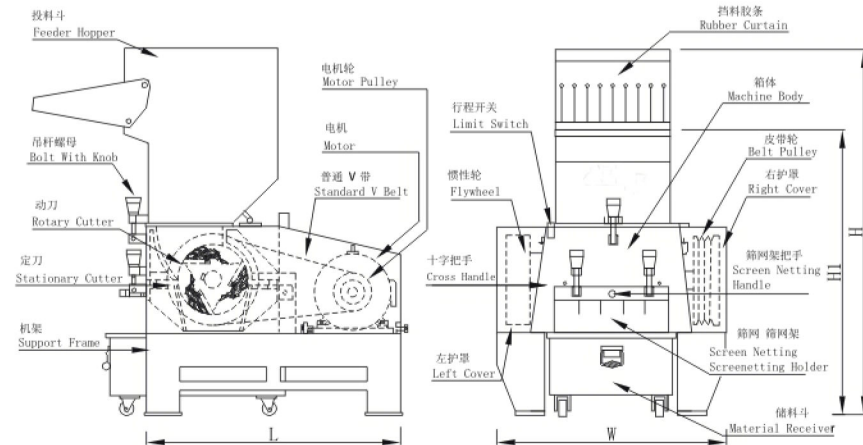

技术参数 SPECIFICATIONS

型号 Model	粉碎口径 Grinding Chamber (mm)	粉碎能力 Grinding Capacity (KG/H)	固定刀 Stationary Cutter	旋转刀 Rotary Cutter	筛网孔径 mesh size (mm)	功率/Power		外形尺寸 Dimensions (LxWxH1 mm)	净重约 Approx. Net Weight(KG)	静音尺寸 Dimension for sp (mm)	回收风机 功率 Collective Blower	静音重量约 Approx. N.W. for sp(KG)
						KW	HP					
GV600/XC-GV600-SP	610x330	130-230	4	6	Φ10	15	20	1200x1070x1670x1300	1100	1940x1080x1980	2.2	1150
GV800/XC-GV800-SP	815x470	180-280	4	6	Φ10	22	30	1600x1555x2110x1590	1840	1850x1540x2680	3	2250
GV960/XC-GV960-SP	960x610	230-450	4	6	Φ12	37/55	50/75	2000x1725x2670x2000	2600	2050x1850x2860	4	3500
GV1100/XC-GV1100-SP	1100x800	500-800	4	6	Φ12	75	100	2400x2220x3230x2380	5500	2590x2230x3610	7.5	6500

备注：型号“SP”代表集中静音破碎机。“SP” stands for soundproof granulator with collecting device.

说明：此粉碎能力根据薄膜产品计算，不同产品粉碎能力不相同。Note: The capacities are based on film materials, crushing capacity might be different to other materials. 产品规格若有改变，恕不另行通知。We reserve the right to change specifications without prior notice.

片型破碎机


FLAKE TYPE GRANULATOR

特点：


- 片型刀结构介于爪刀、平刀之间，适合破碎普通片材、管材、型材、板材及包装材料等塑料制品、浇道口；
- 通用型塑料粉碎机，采用密封轴承，使轴承转动长时间保持良好；刀型设计合理，产品成粒均匀；刀座热缩处理，外形设计美观大方。
- 400以下为脚轮安装，500以上选配避震脚；

FEATURE:

- Flake cutter blades are suitable for recycling and restoring of conventional sheets, tube plastics, profiles, packing plastics, extrusion mold products and runners, etc.
- XC-GP series granulators are adopted with sealed bearings which can handle long hour operation. The unique design of the cutter ensures the equality of granule sizes. The cutters are treated thermal processing.
- Within 400 models installed casters. Above 500 models installed anti vibration mounts as optional.

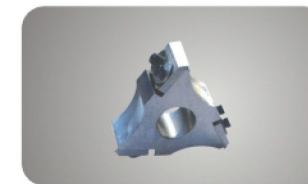

刀架、刀片
Cutter saddle, cutter



筛网 screen mesh
筛网之孔径决定破碎颗粒大小，可根据客户要求订做。
Customized screen mesh available



片型刀架
Flake cutter saddle

技术参数 SPECIFICATIONS

型号 Model	XC-GP230	XC-GP300	XC-GP400	XC-GP500	XC-GP600	XC-GP800	XC-GP960	XC-GP1100	XC-GP1200
	XC-GP230-SP	XC-GP300-SP	XC-GP400-SP	XC-GP500-SP	XC-GP600-SP	XC-GP800-SP	XC-GP960-SP	XC-GP1100-SP	XC-GP1200-SP
粉碎口径/Grinding Chamber(mm)	230x200	310x200	410x240	510x300	610x330	815x470	960x610	1100x800	1200x800
粉碎能力/Grinding Capacity(KG/H)	100-150	150-200	200-250	300-350	350-450	450-600	800-1000	1000-1200	1000-1500
固定刀/Stationary Cutter	2	2	2	2	4	4	4	4	4
旋转刀/Rotary Cutter	6	9	12	15	18	24	30	33	36
筛网孔径 mesh size (mm)	Φ8	Φ8	Φ8	Φ10	Φ10	Φ10	Φ12	Φ12	Φ12
功率/Power	KW	4	5.5	7.5	11	15	22/30	37/45/56	75
	HP	5	7.5	10	15	20	30/40	50/60/75	100
外形尺寸/Dimensions(LxWxH1 mm)	800x660x1120x875	920x725x1200x960	980x810x1260x985	1200x970x1570x1230	1200x1070x1670x1230	1600x1555x2110x1590	2000x1725x2670x2000	2420x2120x3230x2380	2420x2220x3230x2380
净重约/Approx. Net Weight(KG)	290	435	500	900	970	2000	3000	6000	6500
静音尺寸/Dimension for sp(mm)	1200x870x1510	1320x840x1580	1350x930x1590x1320	1560x1070x1784x1440	1560x1170x1870x1500	1850x1510x2510x1990	2150x1794x2910x2240	2590x2230x3610x2500	2590x2230x3610x2500
回收风机功率/Collective Blower(KW)	2.2	2.2	2.2	2.2	2.2	3	4/5.5	7.5	7.5
静音重量约/Approx. N.W. for sp(KG)	400	435	604	900	1180	2380	3500	6500	6800

备注：型号“SP”代表集中静音破碎机。“SP” stands for soundproof granulator with collecting device.

产品规格若有改变，恕不另行通知。We reserve the right to change specifications without prior notice.